
Sarimay-Dzhankeldy Transmission - Sarimay Substation Expansion

Environmental & Social Impact Assessment (ESIA):

Volume I - Non-Technical Summary

CLIENT: NEGU

Date: April 2025



Juru Energy Ltd.

Suite 1, One George Yard, London
United Kingdom, EC3V 9DF
T: +44 207 859 4028

Document Information

Project Name	Sarimay-Dzhankeldy Transmission - Sarimay Substation Expansion
Document Title	Volume I – Non-technical Summary
Juru Energy's Project Reference	UZB_Sarimay-Dzhankeldy
Client	NEGU
JE Project Manager	Nicola Davies
JE Project Director	Jushkinbek Ismailov

Document Control

Version	Version Date	Description	Author	Reviewer	Approver
1.0	22 December 2021	Draft for consultation	Various	Marianne Lupton	Nicola Davies
2.0	25 February 2022	Updated to include outputs from public meetings	Various	Marianne Lupton	Nicola Davies
3.0	18 March 2022	Final for disclosure	Various	Marianne Lupton	Nicola Davies
4.0	26 August 2022	Final post-disclosure	Various	Marianne Lupton	Nicola Davies
5.0	15 April 2025	Updated for including the expansion of the Sarimay SS in the Project	Various	Viktoriya Filatova	Nicola Davies

Disclaimer:

The Environmental and Social Assessment Report: Non-Technical Summary (the “Report”) has been prepared by Juru Energy. Whilst the information contained in the Report reflects the current status, Juru Energy makes no representation or warranty, express or implied, as to the accuracy of the information set forth in this Report and accepts no liability for any information that may have been misstated or omitted.

This report has been prepared exclusively for NEGU. NEGU makes no representation or warranty, express or implied, as to the accuracy or completeness of the information set forth in this Report. NEGU has not independently verified any of the information contained in this Report and accept no liability whatsoever for any information, misstatement or omission contained therein. The Report remains NEGU property.

Table of Contents

List of Abbreviations	vi
PREFACE	v
1 Introduction	1
1.1 Overview of the Project	1
2 Project Description	8
2.1 Project need	8
2.2 Alternative options	8
2.3 Land requirements	8
2.4 Labour requirements	9
2.5 Project components	10
2.6 Project development	12
3 Assessment Approach	15
3.1 Assessment framework	15
3.2 Baseline assessments	15
3.3 Assessment methodology	17
3.4 Stakeholder engagement	18
3.5 Grievance mechanism	23
4 Summary of environmental and social assessment	24
5 E&S mitigation, management and monitoring approach	39
6 Conclusion	39

Table of Tables

Table 1: Summary of stakeholder engagement.....	20
Table 2: Summary of ESIA	24

Table of Figures

Figure 1: Project Location 500kV S-D OHTL Project and Sarimay SS Expantion	3
Figure 2: Project Location of S-D OHTL (Lot 1) (Source: Juru Energy)	5
Figure 3: Project Location N-B-M LILO (Lot 2) (Source: Juru Energy)	6
Figure 4: View of the predominant desert landscape along Lot 1 (source Juru Energy).....	7
Figure 5: Sarimay SS (Lot 1) (source Juru Energy).....	7
Figure 6: General landscape (Lot 2) (source Juru Energy)	7
Figure 7: Small village (Agitma) (Lot 2) (source Juru Energy)	7
Figure 8: Concept of electric energy transmission (Source: http://www.industrial-electronics.com/elec_pwr_3e_9.html).....	10
Figure 9: Simplified schematic of the proposed Project at wider 500kV transmission network.....	12
Figure 10: Existing Sarimay SS and expansion site.....	15

Table of Boxes

Box 1 Steps of ESIA preparation.....	17
Box 2 Steps in the Community Grievance Mechanism (GM).....	23

List of Abbreviations

Acronym	Definition
AOI	Area of influence
CC	Civil Code
CHS	Community Health and Safety
EBRD	European Bank for Reconstruction and Development
EHS	Environment, Health and Safety
EIA	Environmental Impact Assessment
EMF	Electric and Magnetic fields
EPC	Engineering, procurement, and construction
E&S	Environmental and social
ESAP	Environmental and Social Action Plan
ESIA	Environmental and Social Impact Assessment
ESMP	Environment and social management plan
ESMS	Environmental and Social Management System
ESP	Environmental and Social Policy
GBVH	Gender-based Violence and Harassment
GIP	Good International Practice
GM	Grievance Mechanism
ILO	International Labor Organisation
JE	Juru Energy
LARF	Land acquisition and livelihood restoration framework
LC	Land Code
LILO	Line-in Line out
NEGU	National Electric Grid of Uzbekistan
NTS	Non-Technical Summary
O&M	Operations and Maintenance
OHS	Occupational Health and Safety
OHTL	Overhead transmission line
PIT	Project Implementation Team
PR	Performance Requirement
ROW	Right of Way
SanPiN	Sanitary Regulations and Norms of Uzbekistan
SCEEP	State Committee for Ecology and Environmental Protection of the Republic of Uzbekistan
S-D	Sarimay-Dzhankeldy
SEFG	Southern even-fingered Gecko
SEP	Stakeholder Engagement Plan
SS	Substation

PREFACE

The European Bank for Reconstruction and Development (the “EBRD” or the “Bank”) is considering providing a loan to finance the construction of the Sarimay- Dzhankeldy Transmission I Project (S-D OHTL) Project (the “Project”).

In 2022 EBRD has appointed Juru Energy Ltd. (JE) to perform an Environmental and Social Impact Assessment (ESIA) for the Project following the EBRD Environmental and Social Policy 2019 (ESP 2019) and supporting Performance Requirements (PRs) and Good International Practice (GIP).

In the March 2025 EBRD is considering extending existing finance to include works connected with the expansion of the Sarimay SS, specifically the purchase, installation and commissioning of the substation components ("Sarimay SS Expansion works. The original S-D OHTL Project assumed an installation of new 220/550 kV step-up transformer within the existing Substation boundaries. The financing scope excludes site preparation and levelling works, which are ongoing under a separate contract. This updated is undertaken to reflect the proposed inclusion of the Sariary SS into the overall S-D OHTL scope.

This document provides a Non-Technical Summary (NTS) for the Project. This NTS aims to present clearly and simply the draft findings and conclusions of the environmental and social (E&S) impact assessment process for the S-D OHTL and supplementary E&S assessment performed for the Sarimay SS Expansion works.

EBRD has categorised this Project as Category A. Category A projects require a comprehensive ESIA and associated documents. The ESIA is organised as follows:

- Volume I: Non-technical summary (NTS) (this document)
- Volume II: Environmental and social impact assessment (ESIA)
- Volume III: Technical appendices
- Volume IV: Environment and social management plan (ESMP)
- Volume V: Stakeholder engagement plan (SEP) including grievance mechanisms
- Volume VI: Land acquisition and livelihood restoration framework (LARF)

Information disclosure on the draft of ESIA was completed between January 10 and 13, 2022. The public meetings were arranged with responsible organisations, land users as well as people from the nearest communities to the Project to communicate the findings of the ESIA.

A full summary of this consultation is provided in the SEP. Feedback from stakeholders during the public meetings has been integrated into the ESIA. Public disclosure on the EBRD website of key documents for a minimum of 120 days was undertaken between March 2022 to June 2022. ESIA documents Volume I to VI are disclosed via the online locations provided in the table below. Complaints, queries or issues can also be addressed via the channels outlined below. Copies of this NTS in English, Russian and Uzbek can also be viewed at:

- Khokimyat Offices in Tuprokkala, Peshku and Gijduvan districts

Comments from the public disclosure process have been integrated into the ESIA documents for finalisation prior to decision making on the financing.

Please contact Juru Energy on the details below if you require a hard copy

ESIA Consultant: Juru Energy	Project Developer - NEGU	EBRD (during final disclosure)
Name: Viktoriya Filatova, Marina Shiriaeva Address: 10A, Chust Str., Tashkent, Uzbekistan, 100077 Email: sarimay_ohtl_esia@juruenergy.com Phone: +99871 202-04-40	NEGU contact person Badalov Shukhrat Email: sarimay.jankeldi@gmail.com piu.sarimay.djankeldy@gmail.com l.com Phone +998 71 236-68-08 www : uzbekistonmet.uz	https://www.ebrd.com/work-with-us/project-finance/environmental-and-social-impact-assessments.html

1 Introduction

1.1 Overview of the Project

The Sarimay-Dzhankeldy 500 kV overhead transmission line Project and Sarimay Substation Expansion (S-D OHTL and Sarimay SS Expansion or “the Project”) proposed by J.S.C NEGU is located in the southwestern part of the Kyzyl-Kum Desert. An Engineering, Procurement and Construction (EPC) contractor (ŞARA Teknoloji Tesis A.Ş.) will perform the design, construction and commissioning work for S-D OHTL on behalf of J.S.C. NEGU following an open tender process. An EPC contractor for Sarimay SS Expansion works is not confirmed at this time. The Project's main purpose is to facilitate the evacuation to the national power grid of the electricity generated by renewable energy power plants under development in Bukhara and Navoi regions. Implementation of the Project will also significantly improve the transmission network's reliability, efficiency, stability, and quality and security of the electricity supply.

The OHTL is split into two lots (together Lot 1 and Lot 2 are referred to as the “Project”):

- Lot 1 - 500 kV Sarimay- Dzhankeldy OHTL (S-D OHLT) - approximately 127 km OHTL located in the southwestern part of the Kyzyl-Kum Desert.
- Lot 2 – 500 kV Navoi TPP – Bash SS - Muruntau SS LILO OHTL (N-B-M LILO) - approximately 10 km in length, split between two 5 km sections for a LILO connection from the 500kV Bash SS (under development) to the 500 kV Muruntau-Navoi OHTL (under construction).

Figure 1 shows the two lots in Uzbekistan (Lot 1 is identified in blue, and Lot 2 is red). Lot 1 starts from the existing Sarimay Substation (SS) (Khorezm province), which is located close to Nukus village (300 m) and Sarimay village (4.3 km), to the planned Dzhankeldy SS passing close to the villages of Kalaata and Dzhankeldy through an unmodified area of Kyzilkum district. This route crosses Turtkul district of the Republic of Karakalpakstan, Tuprokkala district of Khorezm region and Peshku district of Bukhara region (Figure 2)

The N-B-M LILO (Lot 2) is entirely located in Bukhara province (Gizhduvan district) near the villages of Ayakagitma and Kuklam (Figure 3).

The Sarimay SS expansion works are planned on a 14.6 ha / 146,000 m² area of vacant flat terrain adjacent to the existing Sarimay 220kV/500kV SS near the village of Sarimay, Tuprokkala district in the Khorezm region. The original substation began commercial operation in 2017. The Site is a mixture of hard-surfaced land and soil covered with vegetation.

The boundaries of the selected area are bordered by vacant land to the north, east, and south and by the existing substation to the west. The connection of the S-D OHL to the substation is planned at the Site's northern boundary.

A national Environmental Impact Assessment (EIA) for the Sarimay SS expansion has been conducted, and a positive Environmental conclusion has been received (April 2024). The Sarimay SS project is categorised as Category III under national EIA regulation (low risk).

The landscape of the Project area is steppe, rather uniform and arid, except for the hills adjacent to Ayakagitma lake on the west side of Lot 2. The climate is characterised by mild winters and very hot summers. Strong winds are frequent in February and June and are accompanied by dust and sandstorms. There are three water pipelines in Lot 1 (two complete and one under construction) and a water pumping station with periodic water access points. Herders graze livestock in the wider area of both Lots Figure 4 to Figure 7 illustrate the landscape through which the S-D OHLT routes.

Figure 1: Project Location 500kV S-D OHTL Project and Sarimay SS Expansion

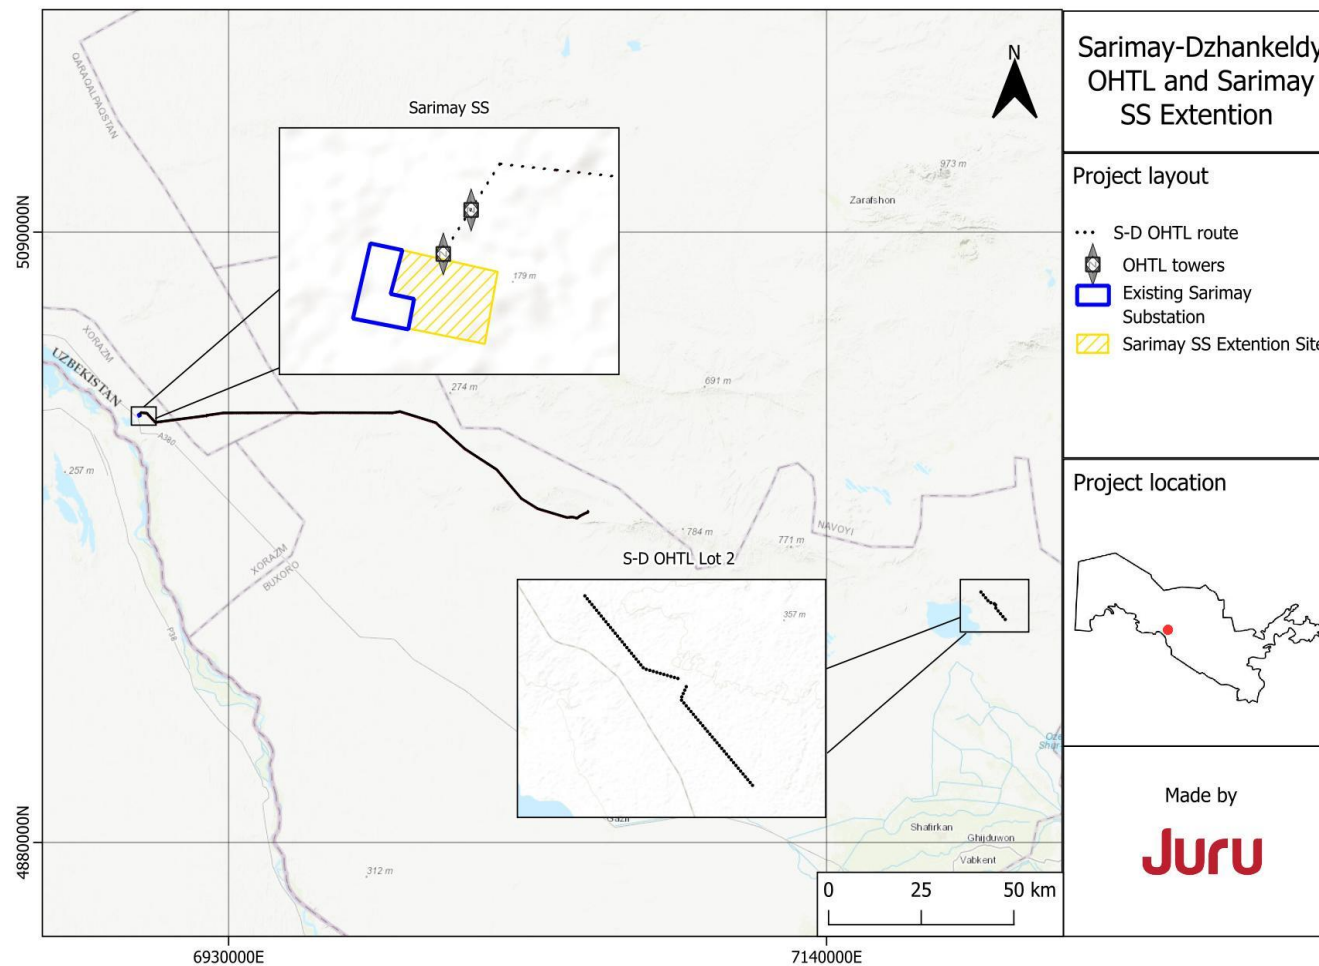


Figure 2: Project Location of S-D OHTL (Lot 1) (Source: Juru Energy)

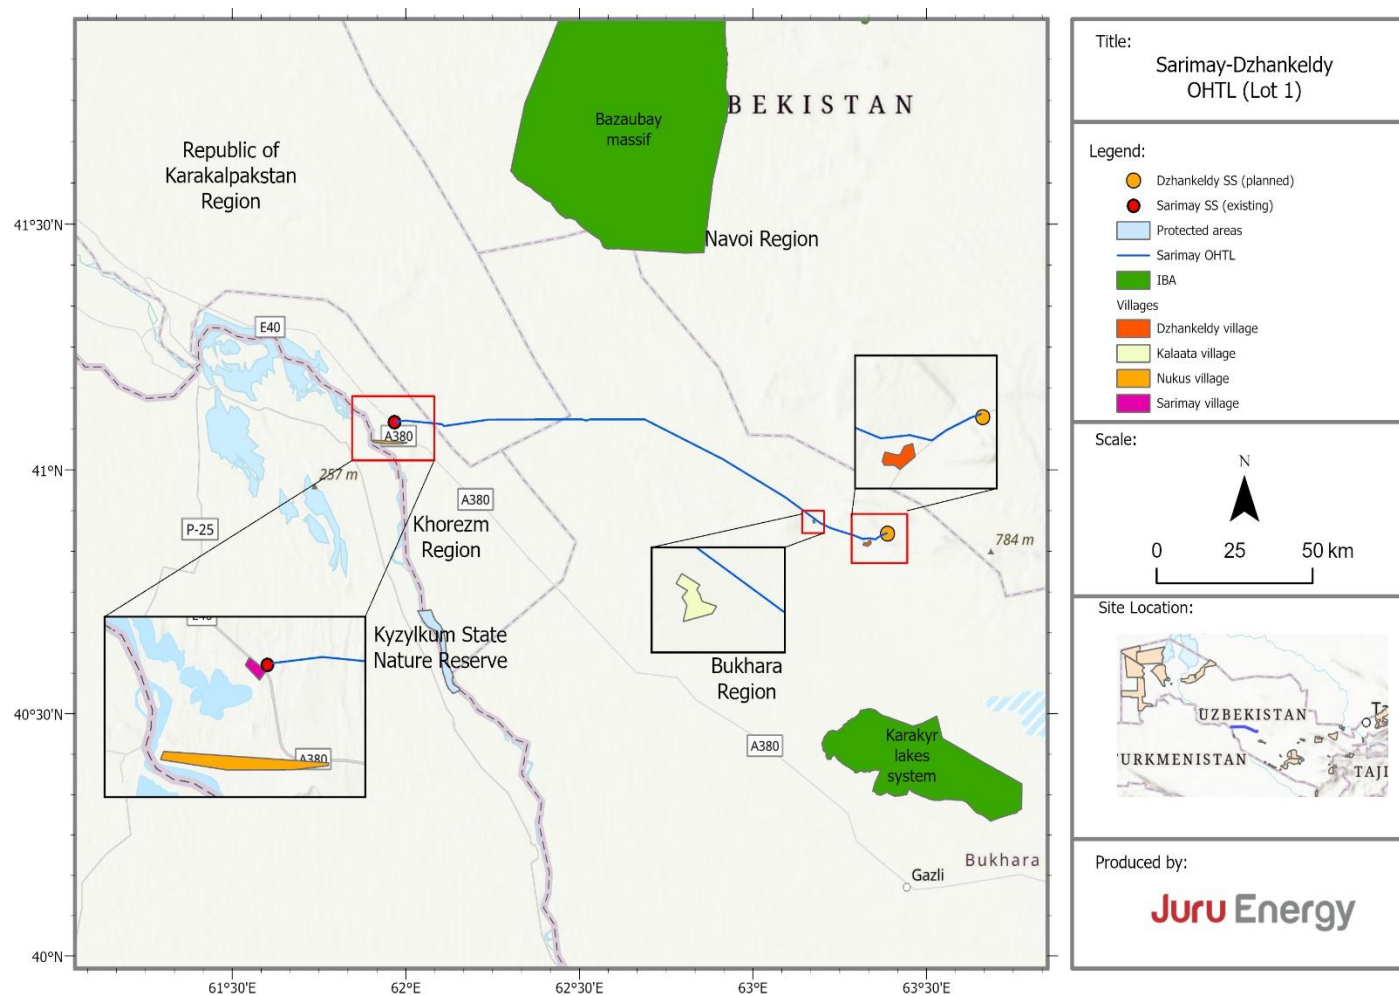


Figure 3: Project Location N-B-M LILO (Lot 2) (Source: Juru Energy)

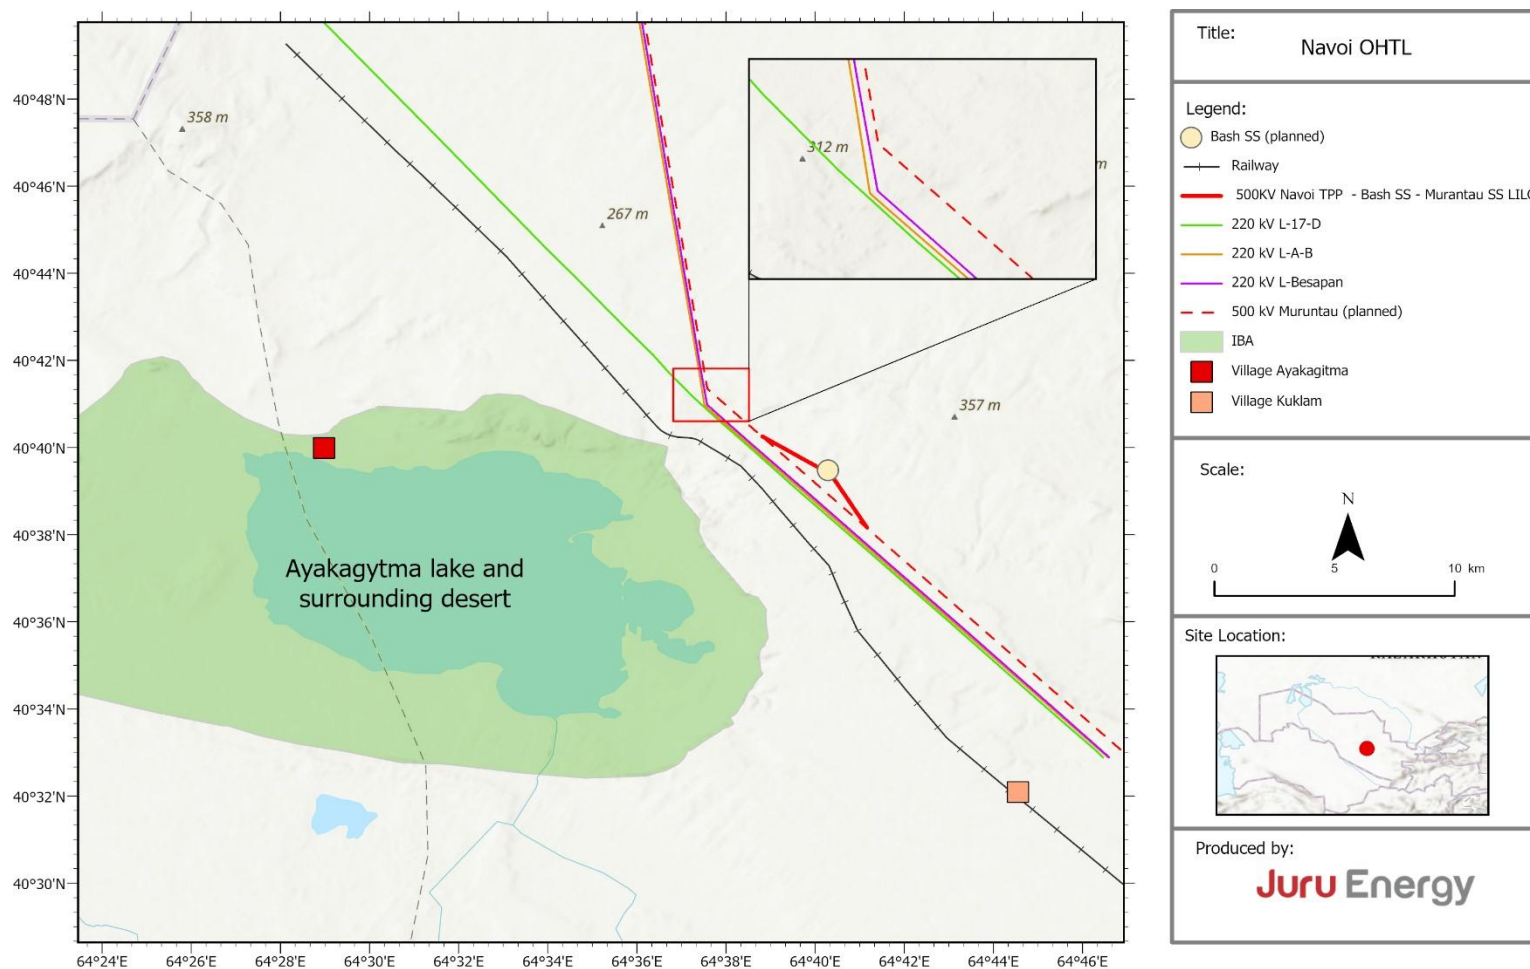


Figure 4: View of the predominant desert landscape along Lot 1 (source Juru Energy)



Figure 5: Sarimay SS (Lot 1) (source Juru Energy)



Figure 6: General landscape (Lot 2) (source Juru Energy)



Figure 7: Small village (Agitma) (Lot 2) (source Juru Energy)



2 Project Description

2.1 Project need

The Government of Uzbekistan aims to increase its power supply and has adopted the 2030 Energy Strategy, which defines several objectives and directions for electricity supply between 2020-2030, including the rapid development of renewable energy projects.

EBRD's 2030 Energy Sector Strategy sets a key objective to *"develop and expand renewable energy use and its integration into the unified power system"* (BDS18-237(F))

EBRD's Green Economy Transition approach promotes *"cleaner production and distribution of energy through greater energy and resource efficiency"* (BDS15-196(F))

The Project will strengthen the power supply stability between the South-West and North-West regions of the country and support the wider integration of renewable energy projects in the South-West to the national grid.

2.2 Alternative options

Alternative concepts and route options have been considered, including the "do nothing" option. Not constructing the Project will avoid any potential environmental and social (E&S) impacts; however, this will hinder the objectives of the country's Concept Note for ensuring electricity supply in Uzbekistan in 2020-2030 and renewable energy transition goals. There is no viable alternative strategic option available for the wider grid strengthening in the North-West. The S-D OHTL plays a key role in connecting the North-West region to the rest of the 500 kV network.

The S-D OHTL route corridor itself is defined by the start and endpoints of the OHTL. Over the ESIA duration, three route corridor options were assessed against technical, environmental, and social criteria through an iterative process. The preferred corridor option (as presented in this NTS) was selected based on the best balance between impact on undisturbed habitat and species of key importance, the length of the line, environmental factors and impact on local receptors. The Sraimay expansion site was chosen to be adjacent to the existing SS and facilitate the safest and technically sound layout considering the S-D OHTL routing. . Final decisions on the design of the Project components (towers, insulators, transformers) and tower siting as described in this ESIA may be subject to change by the EPC Contractor selected to deliver the Project. This ESIA has identified specific design mitigations for inclusion in the EPC specification. These are noted in the ESMP and will be integrated into the EPC contract for implementation during the Project's next phase.

2.3 Land requirements

For newly designed 500 kV OHTL, buildings and structures must be set back 30 m from the outermost conductor on either side of the OHTL; this forms the ROW or servitude. The state owns all land in Uzbekistan. The owners of the land rights along the Project ROW are

the government-owned Committee for Development of Sericulture and Wool Industry (SWID), and the company managing the land is the Dzhankeldy LLC. The Project will need to obtain servitude rights over the land for the OTHL and any permanent and temporary access roads (unsurfaced). J.S.C NEGU will enter into a servitude agreement with the landowner (Committee for Development of Sericulture and Wool Industry).

Procedures for obtaining the use of a ROW in Uzbekistan are well defined. Calculation and compensation of losses to those with and without official land rights will be performed following the Project Land Acquisition and Livelihood Restoration Framework (LARF) which follows national regulations and EBRD ESP 2019 Performance Requirement 5 (PR5), thus ensuring landowners, land users, and lessees are liable to be fully refunded (including the lost profit) in the case of limitation of their rights from the construction or operation of the Project. Land law relating to servitude in Uzbekistan also protects the owner/user and does not deprive the owner of their parcel's possession, use, and disposition rights.

The proposed Sarimay SS expansion works are planned on a 14.6 ha / 146,000 m² area of vacant flat terrain adjacent to the existing Sarimay 220kV/500kV SS near the village of Sarimay, Tuprokkala district in the Khorezm region. The ownership of this land transferred from SWID to NEGU. No other land lease agreements are active on the land.

The ESIA and subsequent E&S assessment for the Sarimay SS Site has assessed potential livelihood losses, summarised later in this NTS. Permanent land take will be for the OHTL tower footprints and the Sarimay SS expansion site. . Grazing and other activities may continue under the line once operational, but not on the SS expansion site which will be fenced and secured to ensure no access by community members. Work at the substations will be entirely within the exiting substation footprints.

2.4 Labour requirements

The construction workforce is not anticipated to exceed 200 persons in total. There may be limited opportunities for local workers in unskilled or semi-skilled temporary employment. A system for hiring personnel and local suppliers will be developed for the Project. Operations work is expected to comprise of maintenance work only, which will be sporadic and undertaken by existing NEGU staff.

Potential risk and impacts to the labour workforce are identified as relating to the risk of insufficient or inadequate personal protective equipment (PPE); workers not provided with contracts or documentation that clarify worker rights; withholding of personal documents or passports, lack of or insufficient payment (often related to overtime hours or night work); excessive working hours, and/or lack of sufficient breaks; and unsuitable accommodation. Workers' accommodation is likely to be a temporary work camp or accommodation in nearby settlements.


To mitigate these risks all contractors will be required to prepare a Human Resource (HR) policy and must adhere to the "labour management plan". A workers and security guard "code of conduct" will be signed by all relevant workers and labour monitoring will be

undertaken. A worker grievance mechanism will be established to be accessible to all workers.

2.5 Project components

An OHTL is the structure by which electrical energy is transmitted from one location to another see Figure 8.

Figure 8: Concept of electric energy transmission (Source: http://www.industrial-electronics.com/elec_pwr_3e_9.html)

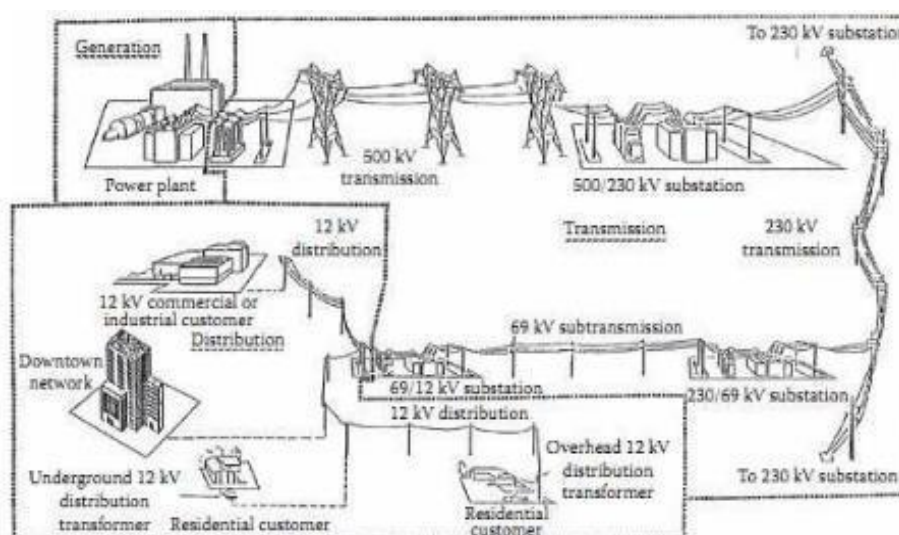

The main components of an OHTL are the towers, foundations, and conductors.

- Towers are typically either suspension, angle or terminal towers that can either be self-supporting or guyed towers with a tower height of approximately 30 to 40 m.
- Foundations are required to fix the towers in place, the foundations may be up to two meters deep, depending on geotechnical requirements.
- Conductors are the lines that string between each tower that transmit the electricity. The distance between each tower is the span; typical spans are between 300 m and 400 m.

The following equipment will be installed in the expanded SS area:

- 2 x 500 kV transformers with concrete bunds
- 13 x single phase reactors with forced air and oil circulation 6000/500-U
- 10 cells 100 MVar shunt reactor
- 18 current transformers
- Supporting equipment, including gantries to receive wires from the overhead lines and other electrical equipment.
- Lighting, fencing, surface drainage, and septic tank for offsite removal of foul waste.
- Landscape plans (as per national EIA).

Related works in of the OHTL works will include:

- End-user works at the planned Dzhankeldy SS (Lot 1)
- End-user works at the planned Bash SwS (Lot 2)
- Establish ROW under the OHTL (including the provision of any related livelihood compensation) (Lot 1 and Lot 2)
- Upgrade existing or new roads (unsurfaced) suitable for providing access to the OHTL towers worksites (Lot 1 and Lot 2)

ROW¹ size is dictated by Uzbekistan standards and for a 500 kV project it is 30 m on either side of the OHTL outermost conductor.


The Muruntau SS and the 500kV Navoi to Muruntau/Besopan OHTL are considered associated facilities to the Project and have already been subject to ESIA following EBRD ESP 2019 by third party entities. Details of these projects can be found at EBRD website.²

A simplified line diagram illustrating how the proposed Lots connect to the region's transmission network is provided in Figure 9.

¹ The right of way (ROW) is termed the Sanitary Health Protection Zone (HPZ) in Uzbekistan and may also be referred as servitude.

²<https://www.ebrd.com/sites/Satellite?c=Content&cid=1395283946426&d=Touch&pagename=EBRD%2FContent%2FContentLayout>

Figure 9: Simplified schematic of the proposed Project at wider 500kV transmission network

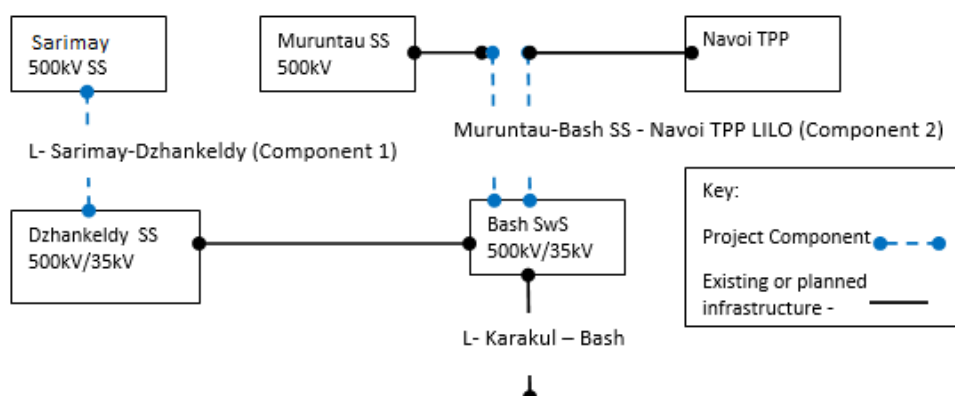

The mobilisation and construction phase for Lot 1 and Lot 2 is expected to take 12 to 18 months and 9 to 12 months, respectively, followed by 3 months of testing and commissioning. Works at the substations will be of shorter duration and timed to be finished before OHTL commissioning works commence.

The substation works are expected to take no more than 14 months between the commencement of construction and the start of operation.

2.6 Project development

There are four main stages of the Project cycle, pre-construction, construction, operation and decommissioning. Pre-construction work includes finalising the design, recruitment and procurement of equipment and site setup. Construction of the OHTL typically progresses sequentially by one or more teams (of a small number of workers) working along the whole or sections of the OHTL route. The main construction activities are site clearance (rocks, utilities, vegetation), establishing vehicle access to each tower location, civil works (tower foundation works), steel delivery, tower construction, conductor stringing and commissioning.

Conductor stringing is typically performed by using a guy wire/pilot wire that is used to “pull” the conductor from the “conductor reel” at the start of the stringing point to another “pilot line winder reel” where the guide/pilot wire is collected. Pull sections incorporate, on average, about four towers and using this method can avoid disturbance to the habitat below the line.

A laydown area will be established for each Lot at a location central to the OHTL route and close to the main delivery rail station. For Lot 1, smaller and temporary equipment storage sites may also be established at strategic locations along the route.

At this time, the water source for the construction process is unknown. Materials and equipment will likely be delivered to the nearest railway station (Sarimay/Navoi) and then delivered to the site using trucks, where possible existing tracks will be used.

JSC NEGU will operate the OHTL and implement preventative, and emergency maintenance works following their corporate operations and maintenance (O&M) procedures. The substations with either be remotely operated or have one or two permanent workers (operating in a shift system). The substation maintenance works will be intermittent and within the operational site boundary.

Works in of the Sarimay SS Expansion works will include:

- Works for site preparation and levelling of the Sarimay SS expansion site (under instruction from NEGU, engaged under a separate contract to the S-D overhead line construction works adjacent to the substation)
- Civil works consist of possible piling for new foundations, upgraded site drainage where necessary, foundation works, and bunds (where required).
- Plant installation - involves delivering equipment to the Site (including possible abnormal loads in the form of transformers). Small cranes may be required to lift the plant into a position fixed to the foundations.
- Commissioning - electrical equipment and SCADA instrumentation systems are installed by specialist contractors in the substation operations room, where they are then commissioned to ensure they function correctly. Commissioning involves the testing of control systems.

The existing SS compound is levelled with stone chippings, and the expanded SS area is expected to be the same. NEGU plans to establish a laydown area/construction camp for machinery and construction materials, including a mobile accommodation container, a temporary kitchen and other auxiliary activities. Subcontractors will supply and install the equipment and conduct the electrical works.

It is not envisaged that there will be any significant need to transport raw materials (aggregates) to or from the Site. Cement for the foundations is likely to be sourced from a nearby batching plant. No upgrade or expansion works are required to the existing access road from the main road to the substation gate. A range of delivery vehicles will be used during mobilisation, e.g., light goods vehicles and vans to deliver smaller items, Heavy Goods Vehicles (HGV) and low-loader units to deliver larger items such as excavators, construction mats and containers for accommodation and welfare units and abnormal loads to deliver the transformers.

Once the equipment is installed, commissioning tests will be undertaken to check that the individual items of the plant and the system work as required. Following successful testing, the substation will be connected to the S-D OHL.


The number of workers during the operation of the substation is 10 people and it is planned to be staffed 365 days a year. During the expansion works a further 35 persons are expected to work.

The planned S-D OHL may be considered an associated facility to the SS expansion This element has been subject to its own Environmental and Social Impact Assessment against

the requirements of ESP 2019. Gaps identified from this process are set out in the Project ESAP.

The Sarimay SS expansion site layout is depicted in Figure 10.

Figure 10: Existing Sarimay SS and expansion site

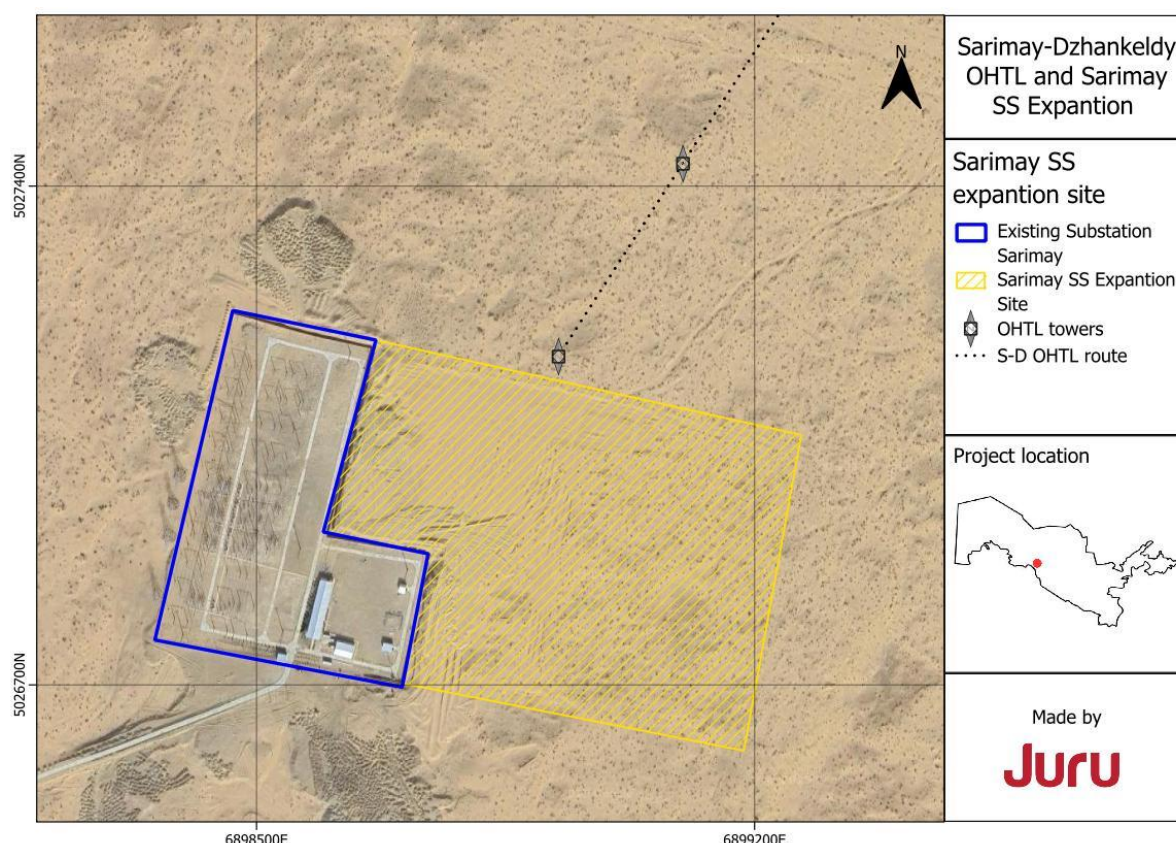

The expected lifetime of the infrastructure is 30 to 40 years (at least). At the end of its lifetime, options will be considered to replace the OHTL, repair it or remove all infrastructure from the site.

Following the Resolution "On the State Environmental Expertise", approved by the Resolution of Cabinet of Ministers No. 541 "On further improvement of the environmental impact assessment mechanism" (2020), a national Environmental Impact Assessment (EIA) Study must be submitted for approval by the state unitary enterprise "The Centre of the State Environmental Examination" of the SCEEP. J.S.C. NEGU will hire a consultant to perform the national EIA at a later date.

3 Assessment Approach

3.1 Assessment framework

The Project has been assessed against the national regulatory framework and the requirements of EBRD ESP 2019, and the supporting Performance Requirements (PRs).

3.2 Baseline assessments

Baseline studies performed to support the ESIA include:

- Biodiversity survey (flora, mammals, reptiles – Lot 1 and Lot 2I)

-
- Southern Even-figured Gecko warm season survey (Lot 1)
 - Avifauna autumn, spring and summer vantage point (VP) surveys (Lot 1 and Lot 2)
 - Houbara Bustard nesting survey (mid-March through mid-May) (Lot 1 and Lot 2)
 - Air quality, noise and soil survey (Lot 1 and Lot 2)
 - Socio-economic survey (Lot 1 and Lot 2)
 - Verification walkover for Sarimay SS Expansion Site (March 2025)

3.3 Assessment methodology

This ESIA and its supporting documentation are prepared for EBRD to support the financing process following the steps outlined in Box 1. The ESIA has identified and evaluated potential E&S impacts that the Project may have on the environment and communities within the direct³ and indirect⁴ area of influence (AOI).

Box 1 Steps of ESIA preparation

The evaluation of impacts has considered the **magnitude** of the predicted impacts and the **sensitivity** of the receptors (physical, human or biological) as defined by the baseline studies and data collection.


The magnitude of the impact considers:

- type and nature of impact (positive / negative)
- scope (e.g., local, regional, global)
- duration (continuous / temporary)
- time period (immediate / delayed)
- reversibility (reversible / irreversible)
- likelihood to occur (none, small, average, high)

The sensitivity of the receptors considers such things as the ability of the receptors to absorb the change or recover from change once the impact is removed.

Magnitude (high, medium, low) combined with sensitivity (high, medium, low) have been combined to assign impact significance in one of the following categories:

- **Critical:** These effects represent key factors in the decision-making process. They are generally, but not exclusively, associated with impacts where mitigation is not practical or would be ineffective.
- **Major:** These effects are likely to be important considerations but where mitigation may be effectively employed such that resultant adverse effects are likely to have a Moderate or Slight significance.
- **Moderate:** These effects, if adverse, while important, are not likely to be key decision-making issues.
- **Minor:** These effects may be raised but are unlikely to be of importance in the decision-making process.

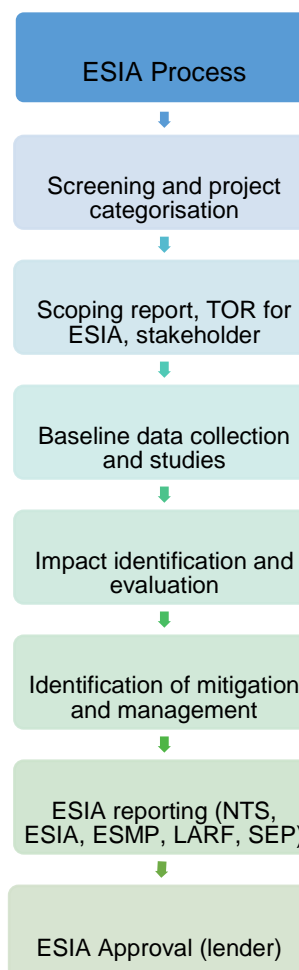

3 Direct area of influence: considers the physical footprint of the project such as the site layout, work staging area and area affected during construction and operation works (e.g. traffic patterns)

4 Indirect area of influence: includes area which may experience project related changes in combination with activities not under the direct control of the project (e.g. inward migration, induced development, visitor influx, access to employment)

- **Neutral:** No effect, not significant, noise need not be considered as a determining factor in the decision-making process

Mitigation and management measures have been identified following the mitigation hierarchy of avoid, reduce/minimise, mitigate and compensate/offset to reduce impact significance to acceptable levels (residual significance). Mitigation and management measures identified in the ESIA have been included in an ESMP (Volume IV) which outlines the framework for implementing the mitigation measures across the different phases of the development cycle. All contractors will be required to demonstrate that they have the procedures in place to implement the requirements of the ESMP. J.S.C NEGU and the Lenders, or their representatives, will undertake regular audits of works against the requirements of the framework ESMP commensurate with the nature of the risk.

3.4 Stakeholder engagement

An important part of the ESIA process has been consultation with local communities and other interested groups (collectively known as stakeholders). Stakeholder engagement started in October 2021 with a scoping site visit and will continue throughout the Project lifetime. A systematic approach to stakeholder engagement has been employed that has sought to build a constructive relationship with stakeholders, particularly the directly affected communities.

The Project has held public meetings and one-on-one meetings with various stakeholders, including:

- government bodies (national, provincial, municipal and local departments/khokimiyats)
- regionally based industries, community leaders
- project-affected communities (PAC) (Nukus, Sarimay, Dzhankeldy, Kalaata),
- communities in the wider area of influence (Agitma, Koklam, Cholobod, Kockcha)
- land users (herders).

Project information leaflets and drafts of the non-technical summary have been distributed during the ESIA engagement activities. Public meetings have been held; including separate meetings at each PAC and with vulnerable groups (women, youth and children, elderly or disabled and illiterate or semi-literate persons); and letters sent to relevant non-governmental organisations. In addition, a number of khokimiyat and government entities were contacted by mail. No concerns were raised during this process. The main feedback was on the topics of biodiversity (avifauna assessment and mitigation), the need for archaeological survey along sections of Lot 1, maintenance of adequate buffer zones with other nearby infrastructure (water pipeline, fibre optic cable), and requests for information on the construction duration, budget, potential impacts on grazing livestock, positive impacts for nearby community including employment opportunities. Table 1 provides a summary of the stakeholder engagement undertaken between October 2021 and January 2022. The Project has established a communication plan (referred to as a Stakeholder Engagement Plan) that includes a detailed communication program to manage stakeholder contact and relations in the future.

As part of the due diligence for the Sarimay Substation Expansion Project, complementary stakeholder consultations were conducted on March 27, 2025. A summary of these consultations is submitted in Table 1. Face to face meetings with various stakeholders and locations, including:

- Khorezm regional Cadastre Chamber
- Sarimay-Djankeldy OHTL substation/camp 1
- Nukus and Sarimay communities
- Sarimay Substation expansion
- Ongoing S-D OHTL construction works
- Local herders' structures
- S-D OHL office and construction work/camp 2
- Villages of Kalaata and Dzhankeldy through an unmodified area of Kyzilkum district

Table 1: Summary of stakeholder engagement

Type of visit	Date	Stakeholders	Concerns raised	How concerns were addressed	Information disclosed
Scoping site visit	October 12 – 13, 2021	Tuprokkala district khokimiyat	Baseline information was provided. No concerns were raised Suggestions that the district can supply food, tents and clothing for construction	Information added to ESIA baseline section 4.5 and the LARF.	Project leaflet
		Sarimay substation			
		Local herders			
		Water station of Navoi Mining Company			
		Sarimay and Nukus Communities			
ESIA Prep. visit	November 12-19, 2021	Impacted herders (three herders)	The Administration of Khorezm region and Karakalpakstan Republic are reviewing borders of their regions. The Project informed village leaders of the upcoming survey.	Information added to ESIA baseline section	Project leaflet
		Department of Makhalla and Family Support under Ministry of Makhalla and Family of Republic of Karakalpakstan			
		Dzhankeldy, Kalaata, Sarimay and Nukus community leaders			
Surveys	November 15-17, 2021	Dzhankeldy, Kalaata, Sarimay and Nukus villages	Conducted survey with community members.	Surveys used to inform the ESIA baseline section	Project leaflet
Official request letters sent	November 25-26, 2021	State Committee of the Republic of Uzbekistan on Ecology and Environmental Protection	Stakeholders provided the technical conditions that should be followed during construction of the route related to their relevant area of expertise.	Project design and route selection has been prepared considering the information provided. Information has also informed relevant sections of the ESIA	Project information and questions included in a letter
		Bukhara and Khorezm khokimiyats			
		Ministry of Employment and Labour Relations of the Republic of Uzbekistan			
		Ministry of Health (or MHRUz)			
		Institute of Archaeology under Academy of Sciences of the Republic of Uzbekistan			
		National Centre for Archaeology			
		Agency of Cultural Heritage under Ministry of Sport and Tourism of the Republic of Uzbekistan			
		“Uztransgas” JSC			
		“Uztelecom” JSC			
		Navoi mining company			

Type of visit	Date	Stakeholders	Concerns raised	How concerns were addressed	Information disclosed
		JSC “O‘zbekiston temir yo‘llari”			
Phone calls	December 6 and 10, 2021	Navoi mining company	Requesting additional information to letters sent in November, 2021	No additions required	Project information provided by phone
		JS “Uzbekistan Railways”			
		Specialist of Soviet Ministers of Karakalpakstan Republic			
Public consultations	January 10-12, 2022	Peshku, Gijduvan and Tuprokkala municipality officials	Community members and officials raised questions related to Project timelines, impacts, employment opportunities and impacts on livestock, which were answered by the Project team	No additions were required as a result of the questions asked	Non-technical summary ESIA, Project presentation and brochures
		Dzhankeldy, Kalaata and Nukua villagers – separate meetings with male and female representatives			
		Herders (five herders in total)			
		Unit on women affairs in Makhalla committee			
		Sarimay community villagers – men only			
		Sarimay village (walk through to speak to women)			
Due diligence meetings ESDD	March 27, 2025	Khorezm regional Cadastre Chamber	Baseline information was provided, and no concerns were raised. An official letter is required to obtain formal information from the Cadastre Chamber.	It was noted by the social consultant, and an official letter was prepared and sent to the Cadastre Chamber (on April 04) requesting the updated locations of the SWID lands in KMZ file format.	Project information and new map with expansion of Project territory
		Sarimay-Djankeldy OHTL substation/camp 1	No concerns were raised		Face to face meetings
		Nukus and Sarimay communities	It was highly recommended by the community leader and the women’s issues representative	The project’s Health & Safety specialist has	

Type of visit	Date	Stakeholders	Concerns raised	How concerns were addressed	Information disclosed
			to maintain regular communication during the hiring process of both male and female workers from nearby communities, in alignment with ongoing governmental statistical requirements.	coordinated with the Women's Issues Representative to ensure that any reports arising during construction and beyond are promptly addressed.	
		Sarimay Substation expansion	No concerns were raised	No responses required	Face to face meetings
		Ongoing S-D OHTL construction works	No concerns were raised	No responses required	Face to face meetings
		Local herders' structures	Herder has no concerns. However, he hasn't been informed about the project.	The project's Health & Safety specialist has coordinated with local herder and informed about the project.	Face to face meetings
		S-D OHL office and construction work/camp 2	No concerns observed	No responses required	Face to face meetings
		Villages of Kalaata and Dzhankeldy through an unmodified area of Kyzilkum district	No concerns observed	No responses required	Face to face meetings

3.5 Grievance mechanism

Any concerns or questions the community may have can be raised to the Project via the “community grievance mechanism” (GM), which sets out how the Project will receive, investigate and respond to all concerns. The steps in the GM are provided in Box 2. Grievances can be raised through the following methods:

- Directly to Project staff during meetings, or Project site visits,
- Via telephone calls.
- In written form (text messages, via email, mobile applications, letters, written requests etc).
- The grievance mechanism will keep strict confidentiality of data, including the personal information of all applicants. At the stage of grievance receipt/registration the complainant will be informed that they can submit a grievance anonymously.

Box 2 Steps in the Community Grievance Mechanism (GM)



Contact details for each of these methods are included in the introduction to this document and below.

Company	Contact Details
NEGU NEGU Complaints line	Telephone +998 7) 236-68-65 Email: info@uzbekistonmet.uz Address: Tashkent city, 100084, Yunusabad district, Osiye street, 42nd house. Web site: uzbekistonmet.uz
NEGU Badalov Shukhrat – NEGU contact person	Email: sarimay.jankeldi@gmail.com piu.sarimay.djankeldy@gmail.com Telephone +998 71 236-68-08

In cases, where the complainant is not satisfied with proposed solution/response to the grievance, they have the right to take other legal action to resolve the grievance.

4 Summary of environmental and social assessment

Potential impacts have been assessed and residual risk significance evaluated based on the proposed mitigation measures set out in the ESIA and the findings of the Sarimay SS expansion E&S site assessment and due diligence. The findings of the ESIA and supplementary E&S site assessment are summarised in Table 2:

Table 2: Summary of ESIA

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
Air quality	<p>Baseline air quality is good with no non-natural sources of air emissions in the AOI (200m on either side of the OHTL, Sarimay SS expansion site and work areas). There is potential for vegetation removal (ROW only) and excavation works, leading to exposure of bare soil and increased risk of dust emissions. The operation of construction vehicles and other construction activities can lead to fugitive dust and gas emissions. Sensitive receptors in the area are mainly the project workers and workers at the nearby water pumping station along the OHTL route.</p> <p>No operational air quality impacts are expected. Decommissioning air quality impacts at Lot 1 and Lot 2 will be similar to those generated during the construction phase.</p>	<p>Design measures to route the OHTL, substation expansion works and access routes at least 200m away from sensitive receptors will help to minimise the significance of impacts. Sustainable land clearance practices and rehabilitation and restoration actions, will ensure disturbed areas of land are restored/rehabilitated as soon as possible to minimise dust generation. GIP for vehicle management, including demarcated access routes, speed limits, well-maintained vehicles, siting of generators away from receptors) will reduce the potential impact from gaseous emissions to acceptable levels. Regular daily visual monitoring of dust episodes, soiling of vegetation, dust resuspension on the roads and dust clouds will also help ensure the significance of fugitive dust and gas emissions are managed to acceptable levels.</p>	<p>Minor (Workers) Neutral (other receptors)</p>
Noise	<p>The baseline noise environment in the direct AOI (200m on either side of the OHTL, Sarimay SS</p>	<p>Design measures to route the OHTL and access routes at least 200m from sensitive</p>	<p>Minor (construction works)</p>

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	expansion site and work areas) is low. and strongly influenced by natural sources of sound, e.g., wind or traffic noise. The absence of permanent receptors in the direct AOI means that noise impacts are expected to be insignificant. Herders and other receptors occasionally in the AOI e.g., road users may be susceptible to changes in noise level during site preparation, from construction-related traffic movements and operation of mobile generators. Works will be short-term and temporary at each tower location and the substation. No noise is expected to be generated during the operations phase. Decommissioning noise impacts will be similar to those generated during the construction phase.	receptor will help to minimise any impacts. For works along the OHTL ROW and at the Sarimay SS expansion site, GIP for noise management will be applied. This includes restricting works to daytime hours and locating all temporary worksites more than 200m from sensitive receptors (specifically the water pumping stations, water pumps, herder camps (active or inactive) and good vehicle management practices (e.g., no revving of engines etc.). Combined, these measures ensure impacts from noise are insignificant.	Neutral (construction traffic)
Waste	Most waste generated during construction, operation and decommissioning will be non-hazardous and low-level hazardous wastes (e.g., oils, paints, solvents). These will be disposed to a regulated landfill. The availability of non-hazardous or construction waste disposal facilities in the local area is good. There is less capacity to dispose of hazardous wastes locally and wastes either have to be transported to sites in Tashkent or Nukus or are accepted at landfills that are not designed in alignment with GIP for hazardous waste disposal. Inadequate handling, transfer and disposal of hazardous waste may lead to uncontrolled releases to land, air, groundwater leading to the degradation and pollution of the receiving environment.	All prohibited materials that may generate hazardous waste will be prohibited in project contracts. A site waste management plan will be required for each phase of the project to set out the plans for handling and to store waste at the Workfront and centrally coordinate transportation and disposal to an appropriate landfill in line with national laws, standards, and GIP. There will be limited if any opportunity for recycling wastes or re-using wastes. Weekly and monthly waste generation volumes for construction wastes (segregated by waste stream defined by waste disposal option) will be reported.	Neutral (general waste and low-level hazardous waste) Minor (hazardous wastes)


E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
Climate resilience	The Project is predominantly susceptible to physical climate-related risks on infrastructure, and worker health is given the expected lifetime of the OHTL (30 to 40 years) that will be evident during the construction phase. Climate risk screening in the short, medium and long-term has projected increasing trends for frequent storms (dust storms), extreme rain events and potential for prolonged periods of extreme heat during the summer months as the key effects of climate change to be managed. Increased wind speed can damage conductors, increase heat convection, and impact worker health (dust storms). Increased temperatures can lead to technical issues and impact worker health leading to a higher prevalence of heat-related medical conditions or greater restrictions on periods of physical work. There is also potential for extreme rain events to create wet soils conditions that, if not accounted for, can lead to groundwork and tower foundation issues.	Climate-resilient design choices and emergency response planning are key to managing climate related impacts e.g. extreme heat. Design recommendations will consider climate projections up to 2085 and whether there is a need to reinforce the structures/foundations for higher design standards (stronger winds, higher temperatures). Emergency preparedness plans will include measures for evacuation/sheltering against dust storms, thresholds for stopping work when the temperature exceeds safe limits for physical exertion (~35 °C), extended rest periods, and provision of sufficient quantities of safe drinking water. Contractors will be required to establish an early warning system for wind and extreme heat events through continuous weather monitoring and provide awareness training to workers on their rights regarding working in these conditions.	Minor
Water resource and quality	No surface water features, or seasonally flooded areas are noted within the direct AOI (OHTL ROW and Substation site). The indirect AOI includes the Amu-Darya River and Lake Ayakagitma, which feed the municipal water supply close to Lot 1 and the Sarimay SS and the irrigated supply to Agitma village near Lot 2. Groundwater boreholes feed nearby local villages. Relatively low volumes of water will be required for the construction works, and no water will be required during operations. The main water use is	During the design phase, measure will be implemented to minimise water needs in the construction process. Methods for minimising water use at the site will be explored. Measures to prevent contamination of groundwater from construction works will align with GIP and include such measures as appropriate storage for chemicals, fuels and oils, refuelling offsite, minimising increased run-off from work areas,	Minor

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<p>during cement manufacture at offsite facilities under relevant licence. No groundwater or other water sources will be used for construction works. Drinking water will be tinkered to each Workfront daily. No significant indirect impact on Amu-Darya River and Lake Ayakagitma or existing water sources used by the local community. expected. The groundwater levels in the region may be quite high, so there is also potential for pollutants to contaminate the groundwater sources if not managed appropriately. Operations-related activities were scoped out from the assessment based on low volumes and short-term maintenance work requirements.</p>	<p>no cement washout at the Workfront sites and no direct discharge of contaminated water or potentially contaminated water to the ground without prior treatment. Construction water use will be monitored throughout the construction phase.</p>	
Soils	<p>Soils along the OHTL route and Sarimay SS⁵ are predominantly fixed and semi-fixed sands with a high sensitivity to erosion when disturbed. The vegetation cover of the fixed and semi-fixed sands is a major factor in retaining their structure. If disturbed or compacted, it can lead to a loss in this vegetation cover and a phenomenon known as “shifting sands”. Due to soil conditions (low organic matter and nitrogen content), natural re-vegetation cannot be expected and therefore the potential magnitude of the impact is deemed moderate.</p> <p>There is potential for risk of causing contamination to</p>	<p>For the OHTL, the construction specification will require a tension stringing technique to be used to avoid impact on habitat between the towers and stringing points. At all locations a site clearance and soil management plan will set out measures to minimise soil removal, confine vehicle movements to reduce compaction impacts and for any area impacted by compaction a requirement to rehabilitate the compacted area to support the return of the impacted area to the original state as quickly as possible following completion of the works.</p>	<p>Moderate (Soil erosion) Minor (Soil contamination and worker health)</p>

⁵ This only applies to the disturbance of soils post site clearance and levelling works with the clearance and levelling works being performed under a separate contract financed by ADB. [NEGU to confirm]

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	soils and experience a deterioration of worker health in particular during foundation excavation works due to the naturally elevated levels of heavy metals in the soils.	This may require aeration of the topsoil, enrichment of the topsoil or reintroduction of selected species and shrubs. Good practice techniques for retaining and re-using the topsoil will be implemented. GIP (including risk assessments) will minimise releases of pollutants to the ground. All workers will be to wear the appropriate personal protective equipment (PPE) when doing groundworks.	
Electric and Magnetic Fields (EMF)	Sensitive receptors in the AOI with the potential to be exposed to levels of EMF and their sensitivity to EMF impacts are predominantly herders who will graze their livestock in the vicinity of the OHTL and workers undertaking maintenance works during the operation phase. There is a potential for short term health effects on electricity workers and members of the public from exposure to EMF; however, the levels of EMF fall away to acceptable levels well within 30m of the OHTL. Furthermore, land-users will not be beneath the OHTL for significant periods. The resultant impact magnitude is therefore deemed to be low. No exposure of EMF is expected outside the SS perimeter fence.	The OHTL routing will maintain at least 200m between the sensitive receptor and the OHTL centre line to manage EMF. All maintenance workers (OHTL and SS) will receive EMF safety program training as per J.S.C NEGU operational procedures. Awareness-raising activities with local farmers and herders are planned to raise awareness of how to reduce exposure when grazing livestock in the ROW.	Minor
Traffic and transportation	Traffic volumes on main (tarmacked roads) are low. Roads used for the delivery of materials (OHTL and SS) will experience increased traffic for a short	A traffic management plan will be prepared that sets out: <ul style="list-style-type: none"> Designated traffic routes are proposed 	Minor

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<p>duration and are considered capable of absorbing this additional road use and therefore impacts on traffic volumes and transportation infrastructure in Sarimay and other nearby communities is expected to be low. The delivery of transformers may require abnormal load delivery vehicles. Abnormal loads will be low in numbers and able to be managed on existing roads.</p> <p>Traffic volumes on the existing track between Sarimay and Uzunkuduk are infrequent and the road condition is unsurfaced and requiring some upgrade works to be suitable for use by project vehicles. The impacts of construction traffic are likely to be temporary, lasting only for the duration of the construction phase. Given the low volumes of traffic on this road, impacts are expected to be negligible. The condition of the road is expected to be improved as a result of the works.</p>	<p>for the transportation of heavy and abnormal loads.</p> <ul style="list-style-type: none"> • GIP for delivery times, routes, speed limits, signage, laydown locations, rest locations. • Any damage to existing infrastructure will be made good by the Project. • Community safety campaign to improve the people's knowledge of the traffic hazard on their roads, public information and other activities to address the issue. <p>An abnormal road route survey and d delivery plan will be required for delivery of the transformers. Any impacts on road users or receptors will be communicated in advance of te delivery via the mechanisms outlined in the SEP.</p>	
Biodiversity - General	<p>Impacts along the S-D OHTL and at the Sarimay SS may include:</p> <ul style="list-style-type: none"> • Introduction of invasive species • Habitat/vegetation loss and degradation • Disturbance to and displacement of animals • Injury/death of terrestrial (non-flying) animals • Bird collisions with powerlines • Bird electrocutions on powerline pylons/towers 	<p>A Biodiversity Action Plan (BAP, will be developed covering all mitigation for SEFG along the OHLT ROW only), including full description of off-site SEFG habitat rehabilitation plan, in relation to achieving "net gain" for SEFG (Lot 1 only)</p> <ul style="list-style-type: none"> • Pre-Construction monitoring and Relocation Procedure including requirement to survey population immediately before construction and relocating to the nearest habitats • Creation of closed zones, at least 	Moderate (SEFG)

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<p>Twenty-three distinct biodiversity features have been identified as Priority Biodiversity Features (PBFs) or Critical Habitat features, potentially sensitive to impacts from the Project, based on the definitions and criteria of EBRD PR6. No additional PBF's or CH features are expected for the Sarimay SS expansion site.</p> <p>These are discussed further in the sections below.</p>	<p>temporary, for the period of construction where transport, livestock and people should not get into that can be used for the release of the geckos after relocation and if found during the excavation works</p> <ul style="list-style-type: none"> Long-term monitoring of the population after construction 	
<p>Habitats and Flora</p>  <p><i>Lepidium subcordatum</i>. Photographed during the field survey effort by Natalya Beshko</p>	<p>Neither Lot 1, Lot 2 or the Sarimay SS site overlap or are adjacent to any national or international protected area. Impacts on habitat and flora are expected to have an impact at the tower footprint locations, along access roads, Sarimay SS site and at any temporary laydown areas within the ROW. In addition, potential direct impacts to one plant species classed as PBF appearing on the national red-list at a status roughly equivalent to IUCN Vulnerable (VU) or higher (category 2 "rare"), namely the <i>Lepidium subcordatum</i> was noted during the baseline survey work. Two additional plant species with national redlist status of category 3, equivalent to IUCN Near Threatened, were also documented within the project area.</p> <p>No plant species were classified as CH triggers.</p> <p>No invasive species were identified in the baseline mapping.</p>	<p>Spring/summer surveys will be performed to identify the location of these species relative to the ROW. Seeds will be collected to support a replanting program to achieve NNL outside the direct area of impact. A bio-monitor will be on hand to direct this work. In addition, micro siting of pylons and access road to avoid <i>Lepidium subcordatum</i> to the extent possible will be performed.</p>	Minor
Terrestrial Fauna and Avifauna – construction	The receptors most at risk of disturbance and habitat loss/degradation, discernment and	A BMP will be prepared that includes off-site vegetation restoration/rehabilitation to	Minor (all species and habitats)

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
and decommissioning	<p>displacement or injury and death include several sensitive species of reptiles and mammals, as well as the Macqueen's (or Asian Houbara) Bustard. The Macqueen's Bustard, Sociable Lapwing, Egyptian vulture, four species of Aquila and Clanga eagles, Pin-tailed Sandgrouse, Saker falcon, 5 species of raptors are categorised as a PBF. No avifauna species trigger CH.</p> <p>Reptiles identified as PBF and protected species status are Russian Tortoise, Southern Even-fingered Gecko (SEFG). The SEFG was confirmed within a 41km stretch (32.3%) of the eastern portion of Lot 1 only.</p> <p>The SEFG is categorised as Critically Endangered globally by IUCN and, therefore will trigger critical habitat as per EBRD PR6.</p> <p>All of the sensitive species of terrestrial (non-flying) animals identified during the baseline study, plus Macqueen's Bustard, may experience either <i>Habitat loss/degradation</i> Impacts or <i>Disturbance/displacement</i> impacts during the Project's construction and/or decommissioning phases and have the potential to be injured by construction related activities.</p> <p>Other species of note include the Marbled Polecat, Caracal and Goitered Gazelle all of which trigger PBF designation.</p> <p>Particular periods of note where disturbance impacts to disturbance-sensitive animals may be</p>	<p>compensate for all permanent habitat loss generated by the Project.</p> <p>This will be combined with a restriction of construction activity to outside of April and May, the key birthing period for Goitered Gazelle (GG) and the nesting period for Macqueen's Bustard (applies to eastern third of Lot 1 subject to restrictions from GG above).</p> <p>GIP for vegetation removal (including minimising vegetation removal along the ROW as much as possible) and for restoring or rehabilitating the area to minimise the risk of "shifting sands" will be employed as set out in a Site Clearance and Rehabilitation Plan.</p> <p>Micro siting of towers and access road to avoid takyr to the extent possible within the potential habitat of SEFG</p>	Moderate (SEFG)

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<p>most significant include the following:</p> <ul style="list-style-type: none"> Goitered Gazelle – April 20 – May 20 (calving season). SEFG – June-August (active season) Macqueen's Bustard – April-May (nesting season) 		
Terrestrial Avifauna – construction and decommissioning	<p>Birds may become electrocuted and experience mortality during the Project's operations phase if they make simultaneous contact with two different electrified parts of the OHTL or with an electrified and a grounded part. Sensitive collision-susceptible bird taxa potentially affected by the Project include Macqueen's Bustard, Sociable Lapwing, Whooper Swan, Common Pochard, Ferruginous Duck, Pallas's Gull, Greater Flamingo, Great White Pelican, Dalmatian Pelican, Glossy Ibis, Eurasian Curlew and Black-tailed Godwit, all of which are classified as PBF for the Project, as well as certain other migratory birds, especially migratory water birds.</p> <p>Sections of the route identified as having a potentially higher susceptibility for bird collision based on the baseline bird characterization are:</p> <ul style="list-style-type: none"> Lot 1: 1 km to 5 km, corresponding to the section where water birds and other migratory birds that use the Amu Darya River may pass through, especially during spring and fall migratory periods. Lot 1: Eastern ~33% (kilometre 81 km to 127 km), corresponding to the section 	<p>The project will install Bird Flight Diverters on overhead, or static lines of the OHTL as follows:</p> <ul style="list-style-type: none"> all of Lot 2 (40.687271° 64.625539° to 40.620080° 64.705109°) westernmost 5 km of Lot 1 (41.097761° 61.969967° to 41.098389° 62.029836°), eastern 33% of Lot 1 (41.008969° 62.943141° to 40.870647° 63.386358°) <p>The project will install "Raptor safe" pylon designs for the entire OHTL:</p> <ul style="list-style-type: none"> Electrified cables suspended below, rather than above support structures ≥2m of insulators at each attachment point of a powerline to a support structure ≥2m separation between electrified cables Jumper cables suspended below insulators/support structures 	<p>Electrocution – Egyptian Vulture, Steppe Eagle, Saker Falcon (Moderate)</p> <p>Electrocution – other <i>Aquila</i> eagles and other sensitive raptors (minor)</p> <p>Electrocution – other migratory birds (insignificant)</p> <p>Collision with powerlines – Sociable Lapwing (Moderate) / sensitive water birds and Macqueen's Bustard (Minor)</p>

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<p>containing potentially suitable nesting habitat for Macqueen's Bustard.</p> <p>Lot 2: Entire route, due to presence of nesting habitat for Macqueen's Bustard, and proximity (minimum ~5 km) to Ayakagitma Lake, which contains high seasonal concentrations of many sensitive and other species of water birds. All of these named species have been classified as PBF for the Project. In addition, certain other migratory birds (including other species of migratory raptors and vultures) may also be affected by electrocution impacts.</p>		
Job creation	<p>The Project will result in a small amount of job creation, local procurement and increased local spending in the local economy resulting in a positive impact on the local economy. This work is likely to be related to unskilled or semi-skilled temporary employment generation related to ground clearance works, cement batching, construction of the foundations, catering, drivers and security work.</p>	<p>During construction a local recruitment plan to encourage employment of workers from villages within 15km of the project will be prepared. The project will communicate casual or unskilled employment and procurement opportunities in advance of the start of works to community leaders, including community womens representatives.</p>	Moderate (positive)
Labour – working conditions	<p>Potential risk and impacts to the labour workforce (in particular day labourers and security personnel are identified as:</p> <ul style="list-style-type: none"> Insufficient or inadequate personal protective equipment (PPE). Not providing a contract or other related documentation that clarify worker rights. 	<p>Each contractor will be required to have a Human Resource policy and perform labour monitoring on all subcontractors.</p> <p>All contractors and their subcontractors must adhere to the "labour management plan", which sets out requirements for contractors, including disciplinary actions.</p> <p>All workers will be required to sign a workers</p>	<p>Moderate (local workers only)</p> <p>Minor (skilled contract workers / NEGU employees)</p>

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<ul style="list-style-type: none"> • Withholding of personal documents or passports. • Lack of payment or insufficient payment (often related to overtime hours or night work). • Excessive working hours, and/or lack of breaks and rest periods; and • Unsuitable accommodation <p>Gender-based violence and harassment (GBVH) arising from gender disparities at the community level may also need to be considered.</p> <p>The operational phase is not expected to create many employment opportunities.</p>	<p>“code of conduct” – workers and a security personnel to sign “code of conduct” – security personnel</p> <p>A worker grievance mechanism, accessible to all workers will be established.</p>	
Occupational health and safety	<p>During construction, the majority of the workforce will be skilled, experienced workers. However, local workers may not have worked on a construction site previously and will be at a higher risk of accidents or incidents. Certain risks identified include:</p> <ol style="list-style-type: none"> 1) Climate risk (see above) 2) Contaminated soils 3) Electrocution 4) EMF (see relevant section) 5) Falls from heights 6) Machinery handling injuries 7) Slips, trips and falls 	<ul style="list-style-type: none"> • Follow national legislation on the design of OHTLs. • Prepare a Project-specific health and safety plan (OHS plan) for each Project phase that covers requirements for all Project-specific and general risks in the construction of OHTLs. • Perform Project-specific risk assessment. • Provide appropriate PPE. • Undertake OHS awareness training throughout construction and operations for all workers and affected community. 	Minor

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<p>Temporary construction worker accommodation camps could expose workers to the risks of illness and below standard welfare arrangements.</p> <p>Specific risks related to the prevalence of dust storms, extreme heat and lightning strikes have also been identified.</p> <p>During the operations phase, workers will undertake operations and maintenance works at along the OHTL and at the substations in accordance with J.S.C NEGU H&S management policies, plans and procedures.</p>	<ul style="list-style-type: none"> • Maintain an accident and incident reporting procedure. • Monitor health of workers. • Produce a Workers' Accommodation Plan 	
Community health and safety	<p>Communities may be at risk of the following:</p> <ul style="list-style-type: none"> • Introduction of workers increasing GBVH between workers and community members. • An influx of people causes strains on local infrastructure. • Risk of passing communicable diseases, particularly COVID-19, between workers and the community. 	<ul style="list-style-type: none"> • Implement awareness-raising activities to inform local community members of key risks and the Project grievance mechanism. • Require workers to sign a workers "code of conduct". • House workers outside the Project area or municipality in accommodation away from the local communities. • Prepare a plan/strategy to guard workers and community members against contracting communicable diseases (particularly COVID-19) 	Minor
Hazardous materials safety	<p>The mismanagement of hazardous materials has the potential to cause contaminated to ground and also risk to workers.</p>	<ul style="list-style-type: none"> • Procurement procedures will set out in contracts the prohibition of hazardous substances based on international 	Minor

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
		<p>protocols.</p> <ul style="list-style-type: none"> The use of hazardous materials will be addressed according to national laws and international standards and GIP. Appropriate training and PPE will be given to works and defined in the OHS plan. All hazardous material at the warfronts will be security stored to minimise risks to community members. 	
Security	<p>Security guards will likely be assigned to protect Project equipment during the construction phase. Security guards are often the first point of contact between community members and the Project; therefore, they are the most vulnerable to conflict or harassment or to receiving conflict or harassment from community members.</p>	<ul style="list-style-type: none"> Prepare a security plan that outlines the security requirements for construction and operations (including numbers of guards, whether they will be armed, use of video technology, training and background checks for guards etc.). Employ local security guards where possible. Require all security personnel to sign “code of conduct” – security personnel. Where necessary, include fencing, safety signage (in locally used languages) and other relevant features to deter community members from entering the work area or climbing the OHTL towers. 	Minor
Emergency preparedness and response (construction and operation)	<p>Accidents and emergencies can happen unexpectedly. The Project site is remote, so any access to medical facilities or support from local emergency services may be difficult. In addition,</p>	<ul style="list-style-type: none"> Prepare an emergency preparedness and response plan (EPRP), particularly including access to medical facilities, and dust storms given the location of the 	Minor

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	<p>communication along the OHTL route is patchy and cannot be relied upon.</p> <p>Natural hazards including dust storms, and earthquakes may also occur unexpectedly.</p>	<p>Project.</p> <ul style="list-style-type: none"> Establish a communication network along the entire OHTL route during the construction phase. Undertake OHS and emergency drills throughout construction and operations. Incorporate provision for dealing with climate-related risk (as per section above) into the EPRP. Establish a schedule for emergency drills. 	
Land	<p>The Project will not result in any physical displacement impacts to create the ROW for the OHTL or the access tracks or for the SS Expansion site.</p> <p>.</p> <p>Some permanent *SS and OHTL footprints) and temporary land taken for the Project may adversely impact livelihoods for local herders.</p> <p>During operation, the Project footprint will reduce to the SS footprint and tower foundation area only and the access tracks to the right of way. No livelihood issues are anticipated during this phase, however some disruption to herders may be possible.</p>	<ul style="list-style-type: none"> Livelihood restoration measures are outlined in Project LARF to address the loss of land or income resulting from the construction works, Sarimay SS or the presence of the OHTL towers. The requirements of the LARF will be prepared once the Project design has been completed, which discloses all compensation for loss of livelihoods, and, if relevant, livelihood restoration activities. 	Moderate
Cultural heritage	No protected or identified cultural heritage has been identified in the direct AOI. Consultation indicates potential disturbance of previously unidentified	<ul style="list-style-type: none"> Conduct archaeological surveys along Lot 1 Sarimay-Dzhankeldy (as recommended by the Archaeological Institute) once the 	Minor

E&S aspect	Summary of impact (Lot 1 and Lot 2 unless stated otherwise)	Summary of Mitigation and Monitoring measure	Residual significance (post mitigation)
	cultural heritage items (called chance finds) during construction, based on recent localised finds in the region for Lot 1 and Lot 2 during the construction phase.	<p>design is finalised.</p> <ul style="list-style-type: none"> Establish a chance find procedure (including national and EBRD requirements and following GIP) for the construction or any phase requiring excavation works (as relevant to the scope of works). 	

5 E&S mitigation, management and monitoring approach

As part of the ESIA, a framework Environmental and Social Management Plan (ESMP) has been prepared (Volume IV of the ESIA). The ESMP sets out Project-specific mitigation measures arising from the impact assessment process and GIP. The requirements of the ESIA will be implemented by JSC NEGU or the EPC Contractor.

JSC NEGU will establish a Project Implementation Team (PIT) to oversee the development and construction works. Once the Project is operational, responsibility for operations and maintenance works (O&M) and any operational E&S requirements will be transferred directly to NEGU operations team.

The EPC Contractor will be required to implement an environmental and social management system (ESMS) to oversee the Project's development and construction activities. The ESMS will include policies, assessment documentation, Project-specific management plans, key sub-plans on waste management, labour management, accommodation, employment procurement, biodiversity, including biodiversity action plan for the SEFG and reporting templates for monitoring progress. The ESMS framework must be aligned with the requirements of ISO14001 Environmental management and ISO 45001 Occupational Health and Safety management. Underpinning the project plans will be a Project Policy setting out core values and principles of the Project.

6 Conclusion

The overall outcome of the ESIA is that the Project is an effective and viable energy infrastructure project that is central to the transition of the country to renewable power and grid strengthening needs.

The Project is considered to be suitable for development and able to comply with the national regulatory framework and the requirements of EBRD ESP 2019 subject to implementing the mitigation measures identified in the ESIA. The measures identified in the ESIA enable the Project to avoid, or where avoidance is not possible, minimise, mitigate or compensate adverse environmental or social impacts and issues to workers, affected communities, and the environment including priority biodiversity features and critical habitats. For the SEFG, a critical habitat species, a pathway to net gain has been outlined that will be elaborated in a Biodiversity Action Plan.

Key commitments outlined in the ESIA and ESMP are incorporated into the Lender Environmental and Social Action Plan (ESAP) that will be appended as a contractual obligation to the financing agreement with EBRD.